

# KOMATSU®

## Product data

### Forestry Quality™

**Komatsu OCE** is a product free from nitrite and amine. It is based on monoethylene glycol with necessary corrosion inhibitors added to prevent the product from damaging metals such as the aluminium contained in a cooling system.

**Komatsu OCE** meets most engine manufacturers' requirements, and can therefore be used even when the manufacturer recommends a different product.

**Komatsu OCE** is tested and meets the requirements of British Standard BS6580: 1992, and meets the requirements stated in the: ASTM D3306, SAE J1034, ONORM V5123, JIS K2234, CUNA NC 956-16, AFNOR NF R15-601.

*Product can be stored for at least 5 years in an airtight container.  
Do not use containers made of galvanized steel.*

**Description:** Blue fluid.

#### Properties:

Density at 20 °C (g/ cm<sup>3</sup>) 1.110-1.140


pH (33 % solution) 7-8.2

Antifreeze to -14 °C vol% glykol 25

Antifreeze to -38 °C vol% glykol 50

## KOMATSU®

Komatsu Forest AB  
PO Box 7124, SE-907 04 Umeå  
Tel +46 90 70 93 00  
[www.komatsuforest.com](http://www.komatsuforest.com)

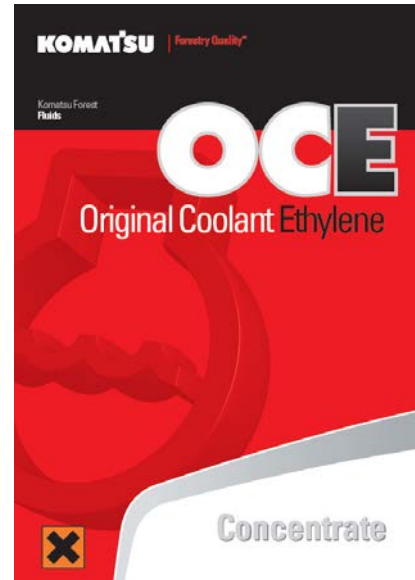

OCE, ORIGINAL COOLANT ETHYLENE

